



4UD[®]Bee
Your Trusted Self Service Laundry Partner

COMMERCIAL LAUNDRY SYSTEMS

GIANT-C⁺




Washer

		Non-Heater	Heater
CYLINDER			
Drum Volume	cu.ft (l)	3.6 (102.7)	3.6 (102.7)
Diameter	in.(mm)	22.1 (560)	22.1 (560)
Depth	in.(mm)	16.5 (419.3)	16.5 (419.3)
Capacity	lb (kg)	22.5 (13)	22.5 (10.2)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.7 (983) x 30.2 (767)	27 (686) x 38.7 (983) x 30.2 (767)
With Door Opening	in. (mm)	50.8 (1,291)	50.8 (1,291)
Carton (WxHxD)	in. (mm)	29.7 (755) x 44.4 (1,127) x 31.3 (795)	29.7 (755) x 44.4 (1,127) x 31.3 (795)
Weight (Product/Carton)	lb (kg)	191.8 (87) /211.6 (96)	191.8 (87) /211.6 (96)
SPEED			
Wash	RPM	50	50
Extract (High Speed)	RPM	1,150	1,150
G-force	G	413	413
ENERGY			
Electric Ratings	V/Hz/A	120/60/5	
		220~240/50/5	220~240/50/15~175
		220/60/5	
WATER USAGE			
Water Consumption	gal (l)	13.4 (50.8)	22.7 (86)
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	Lower than 62	Lower than 62
Program Duration in Minutes (Default)	min	36	60 (60°C program)
SYSTEM & CONTROL			
Inverter Direct Drive Motor		O	O
Intelligent Electronics Controls		O	O
Heating System	W	-	3,600
Compartment Dispenser		3 compartment dispenser	3 Compartment dispenser
Forced Drain System		O	O
Pricing Program		Special Vended Price	Special Vended Price
PROGRAMS			
Program List		Hot	90°C (194°F)
		Warm	75°C (167°F)
		Cold	60°C (140°F)
		Delicates	40°C (104°F)
		Add Super Wash	Cold
	-	Delicates *Rinse+Spin	
EXTERNAL FINISH			
Drum		Stainless Steel Drum	Stainless Steel Drum
Top Plate		Porcelain (Single) / Painted Steel (Stack)	Porcelain (Single) / Painted Steel (Stack)
Transparent Glass Window Door		O	O
Colors		Bluish White / Platinum	Bluish White / Platinum
Cabinet		Painted Steel	Painted Steel
Control Panel		Painted Steel	Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	8 (220~240V) 12 (120V)	8 (220~240V)
PCB Fuse - Filter Assembly	amps	15	15

		Non-Heater	Heater
		Coin	Card / OPL
Single	F1069FD4P	F1069FD7P	F1069FD3S
Stack	F1069FDP	F1069FD6P	F1069FD2S

* Dimensions and weights are approximate.
 * Design, features and specifications subject to change without notice.
 * Some models may not be available for sales in certain countries.
 * Model name can be varied by countries.

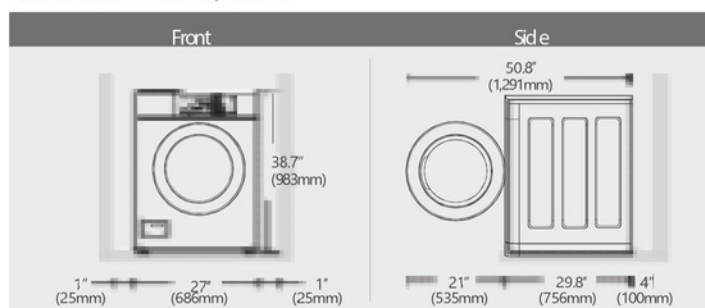

Dryer

		Gas	Electric
CYLINDER			
Drum Volume	cu.ft (l)	7.1 (201)	7.1 (201)
Diameter	in.(mm)	26.1 (663)	26.1 (663)
Depth	in.(mm)	22.5 (570.6)	22.5 (570.6)
Capacity	lb (kg)	22.5 (10.2)	22.5 (10)
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.7 (983) x 30.1 (764)	27 (686) x 38.7 (983) x 30.1 (764)
With Door Opening	in. (mm)	49.8 (1,264)	49.8 (1,264)
Carton (WxHxD)	in. (mm)	29.9 (760) x 46.1 (1,170) x 31.3 (795)	29.9 (760) x 46.1 (1,170) x 31.3 (795)
Weight (Product/Carton)	lb(kg)	130 (59)/143 (65)	130 (59)/143 (65)
OPERATION			
Electric Ratings	V/Hz/amps	120 (240)/60/5	120 (240)/60/26
		220~240/50/2.4	220~240/50/22.5
		220/60/3	220/60/21
Heating Type	Type of Drying	Gas	Electric
		Ventilation	Ventilation
		160	160
Air Flow	CFM	0.4 (120V/60Hz)	0.4 (120V/60Hz)
Motor	KW	0.3 (220~240V/50Hz)	0.3 (220~240V/50Hz)
		0.4 (220V/60Hz)	0.4 (220V/60Hz)
Gas Ratings	KW/BTU	-	-
Heating Element	W	-	5,400 ¹⁾
Program Duration in Minutes (Default)	min	45	45
CONNECTIONS			
Air Outlet Diameter	in.(mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in.(mm)	4 (100)	4 (100)
SYSTEM & CONTROL			
Pricing Program		Special Vended Price	Special Vended Price
Intelligent Electronic Controls		O	O
PROGRAMS			
Program List		High Temp	High Temp
		Med Temp	Med Temp
		Low Temp	Low Temp
		No Heat	No Heat
EXTERNAL FINISH			
Top Plate		Painted Steel ²⁾	Painted Steel ²⁾
Transparent Glass Window Door		O	O
Colors		Bluish White / Platinum	Bluish White / Platinum
Cabinet		Porcelain (Single) / Painted Steel (Stack)	Porcelain (Single) / Painted Steel (Stack)
Control Panel		Painted Steel	Painted Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminium	Aluminium

		Gas	Electric
		Coin	Card
Single	RN1329AN4S RP1329AN4S	RN1329AD1S	RN1329A4S
Stack Upper	RN1329AN7S RP1329AN7S	RN1329AD5S	RN1329A7S
Stack Lower	RN1329AN1S RP1329AN1S	RN1329AD6S	RN1329A1S

* RN : LNG, RP : LPG * Dimensions and weights are approximate.
 * Design, features and specifications subject to change without notice.
 * Some models may not be available for sales in certain countries.
 * Model name can be varied by countries.
 1) 4,500W for some countries due to power limitation (e.g. Australia)
 2) Top plate of single dryer in bluish white is "Porcelain".

